

- 12"/15"/17" Fanless Panel PC
- Stainless front bezel
- Intel ULV low power



PT-120PF PT-150PF PT-170PF



- ✓ Reliability
- ✓ Low Power
- ✓ Maintenance

Fanless Panel PC PT-Series


Built-in Speaker



IP-54
Water Splash Compliant




VESA-Mounting

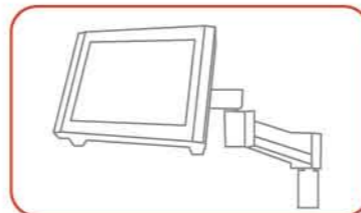

PT-Series

Specification

	PT-120PF	PT-150PF	PT-170PF
System			
Motherboard Type	Intel		
Form Factor	Mini-ITX		
System Chipset	Intel 852GM/Intel ICH4		
CPU Supporting	Intel ULV 1GHz(non L2 Cache)		
FSB	400MHz		
DIMM Socket	One 184-PIN DIMM DDR266 SDRAM, Up to 1GB, default 512MB		
Graphic	Integrated Intel 852GM GMCH		
Audio	Realtek AC'97 Codec		
LAN Controller	Dual LAN Realtek 8100C 10/100 Base-T Ethernet, RJ-45x2		
I/O Connector	Serial Port× 3 (or optional Serial Port × 1 & Paralle× 1) USB Port× 4; VGA Port× 1; Cashdraw Portx1 PS/2 Mini DIN Keyboard Port & Mouse Port Audio Line-in/out and Mic-in Jacks		
Display			
Size	12" TFT LCD Screen	15" TFT LCD Screen	17" TFT LCD Screen
Contrast Ratio	400 : 1	450 : 1	450 : 1
Brightness	250cd/m ²	250cd/m ²	250cd/m ²
Resolution	1024× 768	1024× 768	1280x 1024
Mechanical			
Touch	default Taiwan 5-wire Resistive Touch or ELO by option		
Device	2.5" IDE HDD× 1 (Support Ultra DMA-66/100), default 40GB		
Power Supply	60W ATX Power Supply		
Bezel	Stainless(Optional Black Plastic Bezel)		
Dimension	252(H)x326(W)x80mm(D)	280(H)x380(W)x82mm(D)	327(H)x416(W)x92mm(D)
Option Ordering	PT-150 / 170 with Celeron-M-1.5GHz Pentium-M 1.5GHz CPU with Fan by Request		

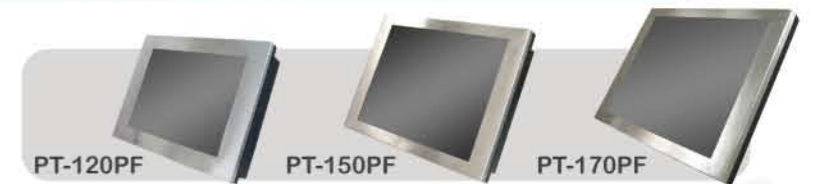

Puritron Technology Inc.

4F, No. 3, Alley 6, Lane 45, Baushing Rd.,
Shindian City, Taipei, Taiwan 231, R.O.C.
Tel : +886-2-2914-7298 Fax : +886-2-2915-6795
E-mail : sales@puritron.com.tw